LIFETIME LIMITED MANUFACTURER'S WARRANTY

The single biggest problem that hose nozzles have is that THEY BREAK!
Our nozzle is "BUILT TO LAST."
The ULTIMATE® HOSE NOZZLE is constructed of EXTRUDED ALUMINUM, STAINLESS STEEL,

REINFORCED PLASTIC
AND COMFORT-GRIP SOFT RUBBER.

We are so confident that you will be equally impressed with the operation and reliability of the ULTIMATE® HOSE NOZZLE, we are placing a "LIFETIME LIMITED MANUFACTURER'S WARRANTY"

on this product.

If at any time your nozzle does not operate, contact
H.L.S.C., Inc. for replacement or repair.

Simply return your nozzle with \$10.95 for return shipping and handling charges. This warranty gives you specific legal rights and you may also have other rights, which

vary from state to state.

H.I.S.C., INC. 1009 Calle Recodo San Clemente, CA 92673


Distributed By:
H.I.S.C., INC.
San Clemente, CA

San Clemente, CA (866) 833-4472 www.ShopDePalma.com

© 2018 H.I.S.C., INC.

This item is protected by US Patent Numbers: 7,028,923 B2 / 6,923,386 B2 / 6,561,439 B1 & US D473,286 S MADE IN TAIWAN



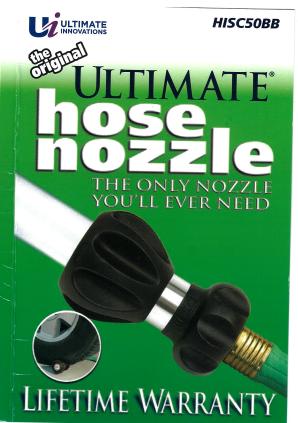

IMPORTANT:

DURING THE WINTER SEASON OR FREEZING COLD TEMPERATURES, REMOVE THE NOZZLE FROM THE HOSE AS RESIDUAL/STANDING WATER CAN FREEZE/EXPAND AND CAN DAMAGE THE NOZZLE.



HAPPY WATERING! For maximum water flow, we suggest you use a 5/8 inch or larger hose!

If you have any questions regarding the operation of your ULTIMATE® HOSE NOZZLE please contact: Customer Service Department

H.I.S.C. Inc. 1009 Calle Recodo San Clemente, CA 92673 Toll Free: 866-833-4472 customerservice@shopdepalma.com

5



INSTRUCTIONS FOR PROPER USE AND CARE OF THE ULTIMATE® HOSE NOZZLE

Should your nozzle operate improperly, it may be due to dirt or debris inside the nozzle. If this happens, it could cause the spray pattern to be irregular. Your nozzle is designed for easy cleaning: Simply insert a 5/32" Allen Wrench into the "Hexagonal" screw head of the nozzle. After removing the screw, unscrew the barrel from the hose stem and, if dirty, wash/clean out the debris. Put the nozzle back together in the same fashion as you took apart making sure the "Hexagonal" screw is secured tightly in place. Keeping the nozzle clean will ensure correct operation.

Note: If the lubrication on the black stem and O-rings is removed, re-lubricate with clear silicone grease; available at any hardware store. If your nozzle begins to leak from center of barrel, please contact our Toll Free number: 866-833-4472 for a new O-ring kit.