LED Display Operation Time/Alarm LED Screen Adjustment Buttons Calendar Day of the Week

LED Screen Functions

1. Time Display

Shows time of the day, date(Month and Day), day of the week, and temperature. The timedisplay can be set for 12 or 24 hour view

2. Alarm Clock/Event Reminder

The alarm clock can be set so sound is played at the time that the alarm is set for, you can also set a day and time so you can be reminded of an important date like a birthday or anniversary.

A timer can be set for as much as 24 hrs. Once the timer is done, Lumicharge will play a tone notifying the user that the time has expired.

4. Temperature

Ambient temperature is displayed. When the lamp is idle, pressing the SET button on the back of the display will change the display between Celsius & Fahrenheit.

Operating and Setting the LED Screen

When powering on your Lumicharge you are put into "Standby" mode. From here you can set Time, Alarm, Timer, Event reminder, Date and Day.

In Standby mode, press the Mode button to cycle through the available functions:

Standby Mode>12/24 Hour Select>Alarm Set>Event Reminder Set> Timer Set

To change the time standard between 12/24 hours, cycle through to the 12/24 Select Screen and press UP or DOWN buttons

To change the temperature reading from C to F, go into Standby mode and

Setting the Time


- 1. In Standby mode, press the MODE button 1 time. Select either 12 Hour or 24 Hour display by pushing the UP or DOWN button then push SET select USA, Europe or OFF for daylight saving time.
- 2. Press UP or Down to select the Hour then press set. Repeat steps for minutes press SET.
- 3. Press UP or Down to select the year. Press SET
- 4. Press UP or Down to set the month. Press Set. Select the day of the month Press SET
- 5. When Time and Date are set, press MODE 5 times to reach Standby mode.

Setting the Alarm

- 1. In Standby mode, press the MODE button 2 times. Press SET and select The Hour. Press SET again and set the Minutes. Press SET
- 2. Press Up or DOWN to select the tone that will play when the alarm Sounds. Press SET when you find the tone that you would like from 8 different tones. The time is now set.
- 3. When the time is set, the LumiCharge gives you 4 options for how the Alarm will function
- 4. First option number 1 indicate the alarm will be set just for one day. The second option is for the alarm to be set for multiple days, and this can be set by clicking mode 3 times when you are on the standby mode
- 5. The number 1 indicates Monday, 2 is Tuesday ,3 is Wednesday, etc. By pressing the up button will remove the day from the alarm and when you press set, it will put back the days to the alarm.
- 6. To cancel the alarm, press SET one more time. The display will show three dots to indicate that the alarm is not set. Return to the Standby screen by pressing MODE 3 times will return to Standby screen.
- 7. The Snooze alarm function can be set by pressing UP button. The

Only for Smart Lamp with Wireless Charger

Wireless charging on/off



Green/Red light

Wireless Charging: Touch/Tap the wireless charging button, the red light is turned on, Place the mobile device with wireless charging function on the charging mat to charge your phone. Green light is turned on when the phone is

connected. PLEASE MAKE SURE YOUR PHONE/DEVICE Can support wireless

charging.
PS: Wireless charging may need the cell phone cover/case to be removed depending on the case thickens and material

Setting the Event Reminder

- 1. In Standby mode, press MODE 3 times. This will bring up the Event Reminder
- 2. Press SET one(1) time and set the Hour. Press SET again to set the minutes. Press set again to set the Month and day.
- 3. Press SET one last time to set the Event Reminder. Pressing SET again will cancel the Event

Reminder and the screen will display dots in place of the Hour, Minutes,

Setting the Timer

- 1. In Standby mode, press MODE 4 times. This will bring up the Timer. 2. Press SET one time and set the Hour. Press SET again to set the
- minutes. Press SET again to begin the Timer. when the timer is done, an alarm will sound. To stop the timer press the MODE button.

The timer can be set anywhere from 1 minute up to 24 hours

MOTION SENSOR NIGHT LIGHT


When it is dark and LumiCharge detects a motion in the room the night light will turn on and will stay on till there is motion in the

Use the switch at the back to Turn ON/OFF this function/light.



Operating Manual

Wireless and Non -Wireless Models

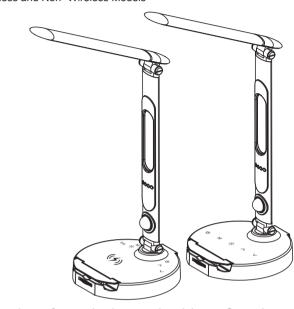

Thank you for purchasing your Lumicharge Smart Lamp. Please read the manual carefully and keep for later use. www.thelumicharge.com

Kev Product Features

Motion Sensor Light. Lights up a dark room to make it easier to find where you are

High Quality LED Light Source. 3 different Hues: Soft White, White & Yellow

Touch Sensitive Light Adjustment. Easily select from 10 levels of intensity to fit any environment.

Extra USB Port. The lamp base contains 1 additional USB port


Patented Charging Wheel. Charge almost any smart phone on the

Supports Apple Lightning, USB-C, and Micro USB devices.

Technical Specs


Shell Material	ABS +Aluminium + Acrylic
USB Output	DC 5V
Net Weight	946g
Product Size	7"x7"x15.8"
Color Temperature	White: 5500-6000K Soft White: 3750-4250K Yellow: 2800-3200K

Product Specs

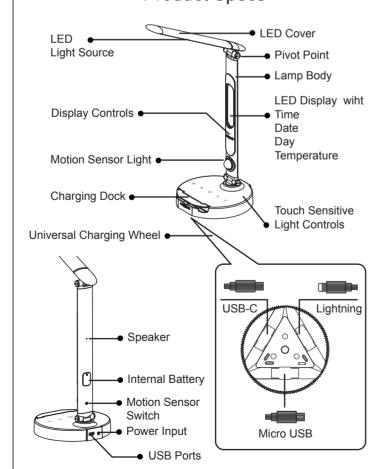

Quick Start

Wireless charging mat

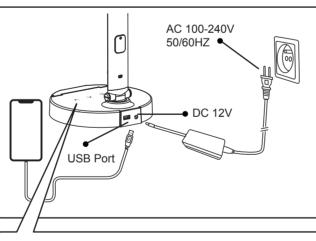



- U Power ON/OFF: Touch this key to turn Lumicharge on and off
- M Mode: Touch this key to change light hue
- Clock display shading: Touch this key to high and low three adjustment
- Increase: Touch this key to increase the light intensit Long press for Fast Adjustment
- Decrease: Touch this key to decrease light intensity Long press for Fast Adjustment

Motion Sensor: When lights are off near the Lumicharge, the Motion Sensor will illuminte with novement (10'-15'). The Motion Sensor will stay illuminated about

15 seconds


195°

Adjustment Capabilities

The Lumicharge lamp head and body can be adjusted for wide Angle lighting area coverage.


Lamp Head Angle Adjusment

- The lamp head has a 195° range of motion
- When adjusting the lamp head, be sure to holdthe base of the lamp for stability.



Lamp Body Forward and **Backward Rotation**

- The lamp body has a forward and backward range of motion of 150°
- When adjusting the lamp body, be sure to hold the base of the lamp for stability.



- Lamp Head & Body Side Rotation
- The lamp body has a left and right range of motion of 230
- When adjusting the lamp body, be sure to hold the base of the lamp for stability.

Warranty Card

This certificate extends the warranty for a period of 6 months from the date of purchase for Registered products. This warranty covers components and workmanship only. Replacement or Repair decision is at the discretion of the manufacturer. This certificate does not provide coverage for lost or damaged parts due to improper usage of the product. The warranty if not valid if we determine there was improper usage of the product.

Product Name Product Color Purchase Date

Product Registration Card

Thank You for your interest in our product. We are happy to have you as a valued customer. Please register your product with us for future communication with us. Please register your product at www.thelumicharge.com

Product Name/Color Purchased From: Purchase Date: **Customer Name:** Contact Email: