


PENDU LUX
KARL TABLE CLOCK
ASSEMBLY INSTRUCTION

FRONT



KEY

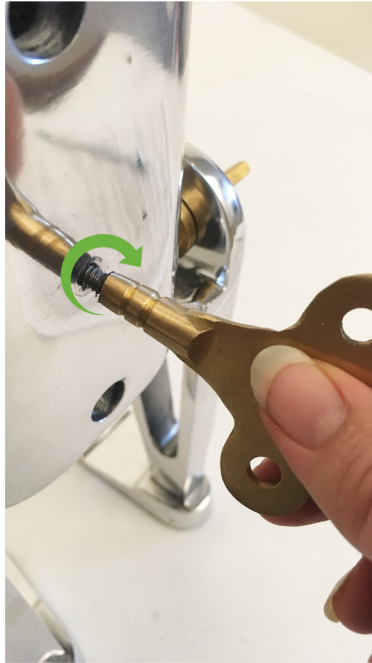


1. INSERT KEY INTO HOLE IN THE HOLE IN THE BACK OF BODY, GENTLY SCREW INTO PLACE



2. TWIST THUMBSCREW ON BOTTOM OF PLATE ON THE BACK OF HEAD TO OPEN BACK PLATE



3. SWING BACK PLATE UP TO ACCESS BATTERY

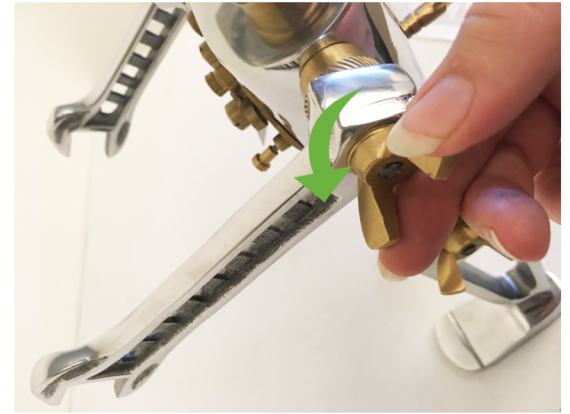

NOTE: ROTATE WINGNUTS TO LOOSEN AND ADJUST ARMS AND LEGS



4. USE N SIZE E90 BATTERY ROTATE DIAL TO ADJUST CLOCK TIME