



# GRILLLIGHT

## Light removal and battery replacement instructions


- 1** Depress release clip.

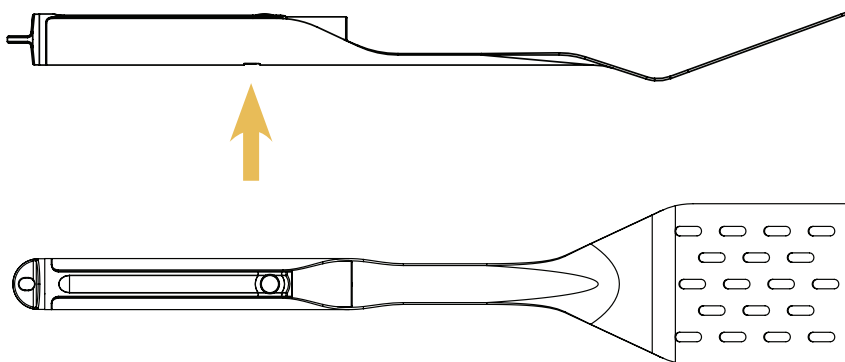


- 2** Pull light out of handle.

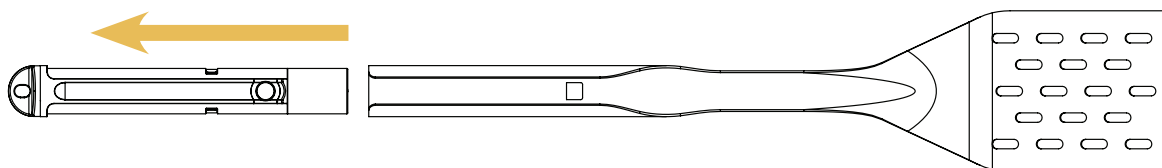

- 3** Unscrew light head.



- 4** Slide battery holder out of light body.



- 5** Remove batteries from battery holder and replace.  
To reassemble - reverse instructions.



email: [sales@grilllight.com](mailto:sales@grilllight.com)

write to: Holton Products LLC • 3900 Dave Ward Dr. • STE 1900 PMB# 231 • Conway, AR 72034  
650.918.0967 • [www.grilllight.com](http://www.grilllight.com)