



Garage Floor Mats

General Information and Product Usage

Thank you for purchasing our product.

Standard Size: 17' x 7'4" (fits standard size SUV's, Mini Vans and Mid-size Autos)

Large: 20' x 7'4" (for large SUV's, Vans and Full Size Autos)

INSTALLATION INSTRUCTIONS:

First, sweep floor clean of debris and then wash floor. Make sure the floor is completely dry before you install the mat. Use your hands to smooth out any wrinkles as you unfold the mat and lay it down flat, fabric side up. Initially, there may be some fold lines showing from the way the product was compactly packaged. Don't be concerned with the creases or wrinkles in your mat as they are only temporary and will disappear soon after proper installation. To install roll out fabric side up and position on floor. Use the enclosed Drymate® Double Sided Tape, Heavy Duty Adhesive and affix tape. **(SEE DIAGRAM A for tape placement)**. TIP: Secure one end of mat to floor with tape, pull tight. Next, secure sides while continuing to pull tight and lastly, secure the opposite end. You might also try rolling the mat tightly like a rug while smoothing out creases and let sit for a day to get any creases to disappear before unrolling and installing.

CLEANING AND CARE:

VACUUMING: Dirt, leaves, and debris can be vacuumed away. For best results, secure mat with the enclosed Drymate® Double Sided Tape, Heavy Duty Adhesive to prevent the vacuum from sucking up the fabric at the edges **(SEE DIAGRAM A for tape placement)**.

EXCESS WATER: If mat becomes saturated from melting snow, rain or spills, it is recommended to wet vac or squeegee excess water off of the mat to speed up the drying process. If possible, hang dry for faster drying.

CLEANING: The easiest cleaning method is to drag mat outside the garage and power wash or hose off with water and mild soap. Any laundry or dish soap will work on most stains or heavy soiling. **Never use harsh chemicals or bleach on the mat as waterproof backing may be harmed. Allow the mat to dry thoroughly before replacing.** If possible, hang mat for faster drying times.

CAUTION! WARNING!

Secure corners of mat down with enclosed Drymate® Double Sided Tape, Heavy Duty Adhesive **(SEE DIAGRAM A for tape placement)** to prevent mat from sticking to tacky tires and/or wrapping around tires. If tires or mat have any sticky material on them or in extreme freezing and thawing conditions it is possible for the vehicle's tires to stick or freeze to a wet mat. If such conditions occur, back up one foot and check mat to ensure it is not stuck to the tires to prevent the mat from wrapping around the tire's axel. Pull mat free before continuing to drive off of the mat.

the mat clean and helping it to dry quicker. Always wipe up any oil, anti-freeze, chemicals or other spilled fluids that may have leaked or dripped from a vehicle. Leaving chemicals on this product for an extended time may cause damage to the mat and floor. Do not drive on mat with snowmobile, studded snow tires, chains, etc. or any other product that could puncture or damage the mat.

WARNING FOR PAINTED OR SEALED FLOORS:

Some types of epoxy, paint or sealers may react to waterproof backing causing the mat to stick to the floor or leave a residue. Refer to your epoxy, paint or sealer Manufacturer's care instructions for precautions or interactions. Allow at least 72 hours after application before installing mat. Check the flooring under the mat periodically to ensure that sealed floor and mat are compatible.

U.S. Patent No's. 6,136,377 and 6,419,988

www.drymate.com



Drymate®
12.2.20

PART #: 1320GI

MO: 40707

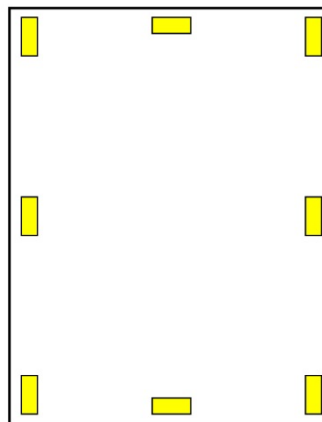


Diagram A

LIMITED PRODUCT WARRANTY

WARRANTY COVERAGE

RPM, Inc. (RPM) warrants to the original purchaser (Buyer) only that the Drymate® or Armor All® Garage Floor Mats and Runners manufactured by RPM, Inc. will be free from defects in material and workmanship under normal use and service for a period of 60 Days from the date of purchase. THIS WARRANTY SHALL NOT APPLY AND NO WARRANTY OF ANY KIND SHALL EXIST IF THIS PRODUCT HAS BEEN SUBJECT TO ABUSE, MISUSE, NEGLECT OR ALTERATION OF ANY TYPE OR CAUSE. In addition, RPM is not responsible for defects resulting from improper use, or from uses beyond design capability. In addition to the foregoing limitations, RPM's limited warranty shall not cover surface stains, including stains resulting from battery acid, gasoline spills, other caustic materials, asphalt, driveway sealer and rubber wheels, defects resulting from improper maintenance or installation, damage from improper usage including, without limitation, burns, cuts, tears, scratches, scuffs, puncture damage from rolling loads, tire chains or studs, snowmobile tracks, improperly casted carts, damage or discoloration from adhesive or floor care products, excessive moisture, alkaline, hydrostatic pressure damage from the subfloor, mold or mildew, installation over gypsum based patching and leveling compounds. No action for breach of this warranty may be commenced more than 60 Days after date of purchase. This warranty is not transferable. Customer must notify RPM of all manufacturer defects within 60 days of purchase. Proof of purchase will be required.

LIMITATION OF LIABILITY

WE REQUEST THAT THE PURCHASER AND/OR USER INSPECT AND TEST OUR PRODUCT BEFORE USE AND SATISFY THEMSELVES AS TO THE CONTENTS AND SUITABILITY. ANY GOODS PROVEN DEFECTIVE DUE TO MATERIALS OR WORKMANSHIP WILL BE REPLACED OR THE PURCHASE PRICE REFUNDED, BUT IN NO EVENT SHALL RPM BE RESPONSIBLE FOR DAMAGES, WHETHER DIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL, IN EXCESS OF THE VALUE OF THE DRYMATE MAX® PRODUCT WHICH IS CLAIMED DEFECTIVE (EXCEPT IN THOSE STATES THAT DO NOT ALLOW THIS EXCLUSION OR LIMITATION). RPM WILL NOT BE LIABLE FOR ANY PURCHASER'S ACT OR OMISSIONS, SUCH AS FAILURE TO FOLLOW INSTRUCTION FOR PRODUCT USAGE.

EXCLUSIVE REMEDY

Buyer's remedy for breach of RPM warranty is limited to replacement, or refund of the purchase price thereof, within 60 Days after notice of defect. These remedies are the exclusive remedies for breach of RPM warranty. RPM shall not be liable for any other charges incurred. In the event that Buyer makes any claim under warranty, RPM reserves the right to require any product to be returned for inspection at Buyer's expense, to RPM Factory, 6665 West Highway 13, Savage, MN 55378. No employee of RPM or any other person is authorized to make any additional warranty or to change this Warranty. Only RPM is authorized to provide warranty service. For warranty information, please call or write to: Drymate® Customer Service, 6665 West Highway 13, Savage, MN 55378, Telephone (952) 808-2266.

**PROP65
COMPLIANT**

**Passes Standard
Flammability
16CFR: 1630-1631**

**BPA and
Phthalate Free**

RPM, Inc. • 6665 West Hwy. 13 • Savage, MN 55378 • 952-808-2266
Visit us on our website @ www.drymate.com

Rev. 1.7.2020

