



Instructions

1

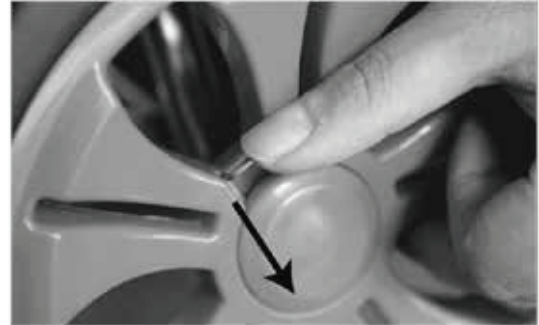


Secure lock located
on both wheels



Press Secure Lock and insert
the wheel in to axel.


2

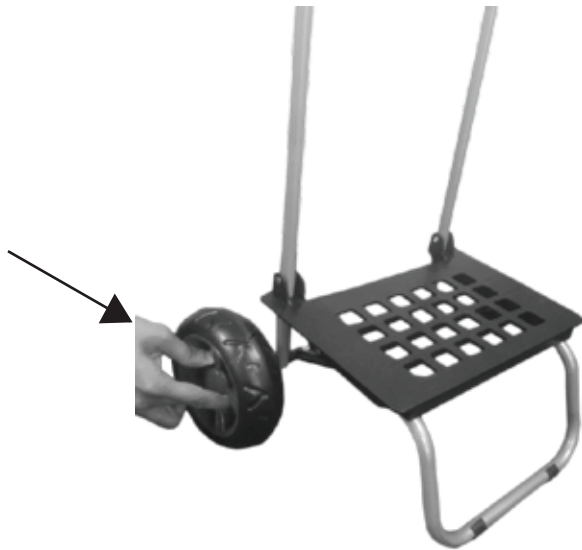

Release the secure lock,
gently try to remove the
wheel from the axle. The
wheel will snap into place.
*(If you can remove the wheel,
return to step 2)*

3

Wheels are in place

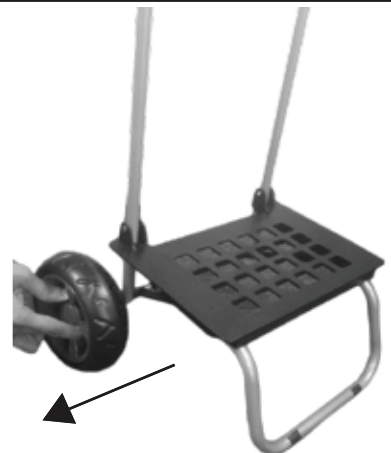

To remove the wheel, press the
lock and pull the wheel out.

4

5



Pull off hook and loop mechanism to open bag

6



Bag should gain shape open on its own

7



Put the Support strap over the cart

8



Attached the hook and loop mechanisms on both sides of the cart

dbest products®

9

To fold back down for compact storage, simply follow the opening instructions in reverse

Care:
Wipe with Damp Cloth



Made In China